

R. C. Tronics Incorporated


2573 East Kercher Road
Goshen, Indiana 46528
Toll Free 1-866-457-7790

Phone 1-574-642-3857
Fax 1-574-642-3858
<http://www.rctronics.com>

EPC-5

RCT-00743-00000, Barrier Strip, Ambulance Power Center

Battery Negatives

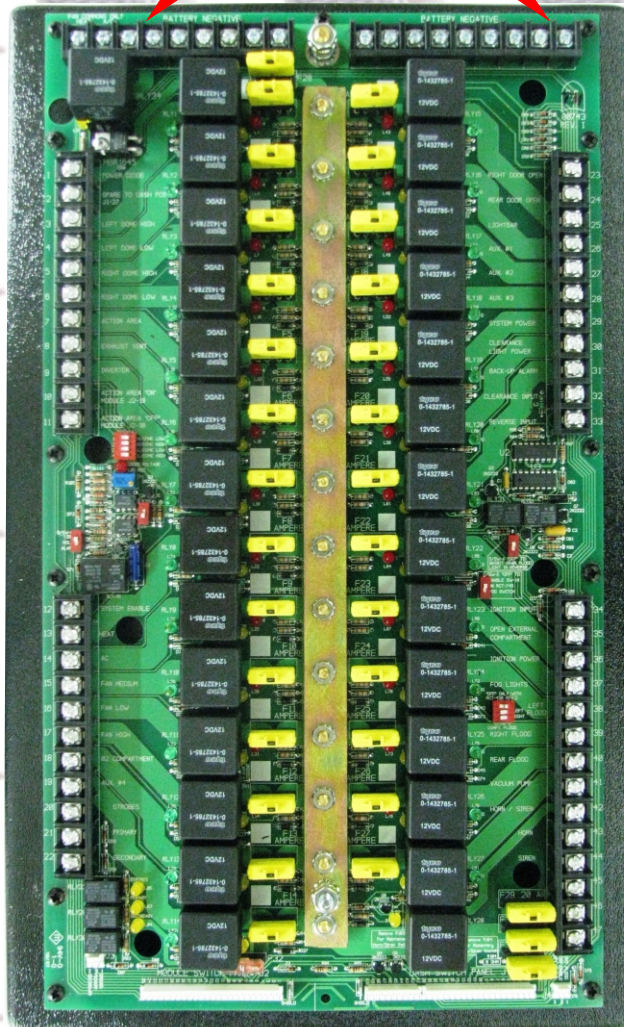

CN18-62 Heat Common (Sink)
CN18-63 A/C Common (Sink)

- 01 Power Diode, Output.
- 02 Spare
- 03 Left Dome High, Output.
- 04 Left Dome Low, Output.
- 05 Right Dome High, Output.
- 06 Right Dome Low, Output.
- 07 Action Area, Output.
- 08 Exhaust Vent, Output.
- 09 Inverter, Output.
- 10 Action Area "ON". (Sink)
- 11 Action Area "OFF". (Sink)

*Dip Switch A, selects which "Dome Lights", operate when "Right Rear or Right Side Doors" opens.
Dip Switch B, "CN" inhibits timing action on "Action Area Lights", off.
Dip Switch C, inhibits output of "Low Voltage".*

- 12 System Enable, Input. (.15 Amp.)
- 13 Heat, Output.
- 14 A/C, Output.
- 15 Fan Medium, Output.
- 16 Fan Low, Output.
- 17 Fan High, Output.
- 18 02 Compartment, Output.
- 19 Aux. 4, Output.
- 20 Strobes, 12VDC, 1 Ampere, Output.
- 21 Primary, 12VDC, 1 Ampere, Output.
- 22 Secondary, 12VDC 1 Ampere, Output.

*J3-1 Ground
J3-2 Primary "CN" (sink)
J3-3 Secondary "CN" (sink)*

- 23 Right Door Open, Input. (Sink)
- 24 Rear Door Open, Input. (Sink)
- 25 Light Bar, Output.
- 26 Aux. 1, Output.
- 27 Aux. 2, Output.
- 28 Aux. 3, Output.
- 29 System Power, Output.
- 30 Clearance Light, Output.
- 31 Back-Up Alarm, Output.
- 32 Clearance Light, Input. (.15 Ampere)
- 33 Reverse, Input. (.15 Ampere)

*Dip Switch F "CN", inhibits "Rear Flood Lights" "CN", in Reverse.
Dip Switch E "CF3" to enable Switch 14 on PCB-00745.
Dip Switch E, operates left | right side floods with "Rear Floods"*

- 34 Ignition, Input. (.15 Ampere)
- 35 External Compartment Door. (Sink)
- 36 Ignition Power, Output.
- 37 Fog Lights, Output.
- 38 Left Flood, Output.
- 39 Right Rear Flood, Output.
- 40 Rear Floods, Output.
- 41 Vacuum Pump, Output.
- 42 Horn/Siren, Common.
- 43 Horn, Normally Closed.
- 44 Siren, Normally Open.
- 45 +12 VDC, F29 Output.
- 46 +12 VDC, F30 Output.
- 47 +12 VDC, F31 Output.

J3-RCT-772 J2-Module Switch Panel J1-Dash Switch Panel J4-RCT-450

**BARRIER STRIP POWER CENTER. PLUG IN FRONT AND REAR SWITCH MODULES.
WE PROVIDE A COMPLETE, NO QUESTION ASKED ONE YEAR WARRANTEE.
ALL REPAIRS MAY BE DONE BY END USER.**

All Inputs and Outputs are Monitored with LEDs, makes Trouble-Shooting a visual event.

All Fuses Monitored for "Open" by a Red LED.

Twenty-Eight, Circuit Breaker Protected Power Relays Provide +12 VDC @ 20 Ampere For All Loads.

22 3/8 inches x 11 3/8 inches X 2.5 inches deep.