


R. C. Tronics Incorporated

2573 East Kercher Road
Goshen, Indiana 46528
Toll Free 1-866-457-7790

DAT-01348-05004
08 Conductor Data Cable

Phone 1-574-642-3857
Fax 1-574-642-3858
<http://www.rctronics.com>

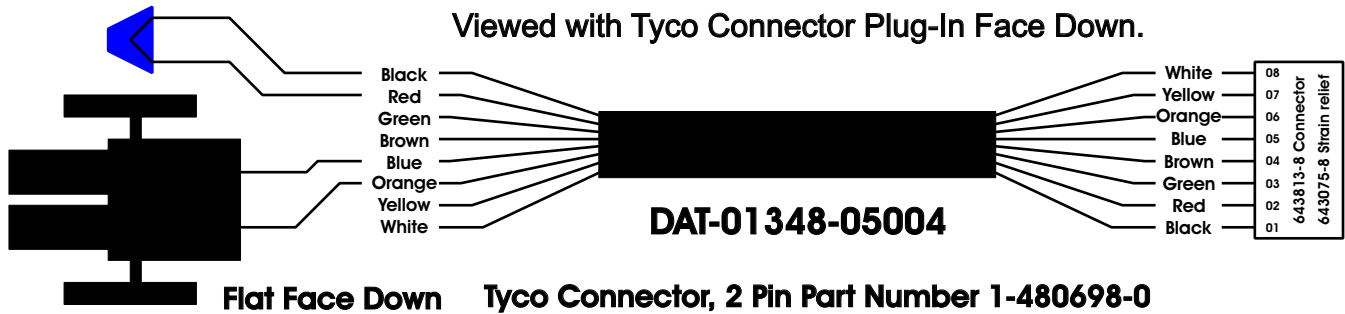

Carol C-2465, 22 AWG, Stranded 7/30/8, unshielded eight conductor cable.
Cut each jacket end 4 inches long, remove jacket on each end.
Requires one (1) Tyco/Amp. 643814-8 connector & Tyco/Amp. 643075-8 end cap.
Place connector into insertion equipment, start with #8 and complete with #1

Wire Nut the following wires together; Black and Red.

Add the following wires to Tyco Connector #1-480698-0; Blue and Orange.

#1 BLACK, #2 RED, #3 GREEN, #4 BROWN,

#5 BLUE, #6, ORANGE, #7 YELLOW, #8 WHITE

***Tyco Connector Operates Relays 5A & 5B on RCT-0786 Bus Power Center
from J3 on RCT-00948, Dash Switch Center. Black & Red Operates 7A & 7B
when taken to an external ground.***

***Tyco Connector Operates Aux. 1 & Aux. 2 on RCT-01490/RCT-01507 from J3
on RCT-01492/RCT-01493. Black & Red Operates Aux.3 with "Ignition".***

D
A
T

0
0
0
0
0

0
0

0
0

0

1st three Letters = Data Cable

2nd five numbers = Print Number

3rd two numbers = Configuration

4th two numbers = Length In Feet

5th last digit = Length In Inches