


R. C. Tronics Incorporated

2573 East Kercher Road
Goshen, Indiana 46528
Toll Free 1-866-457-7790

DAT-01349-05006
10 Conductor Data Cable

Phone 1-574-642-3857
Fax 1-574-642-3858
<http://www.rctronics.com>

Viewed with Tyco Connector Plug-In Face Down.

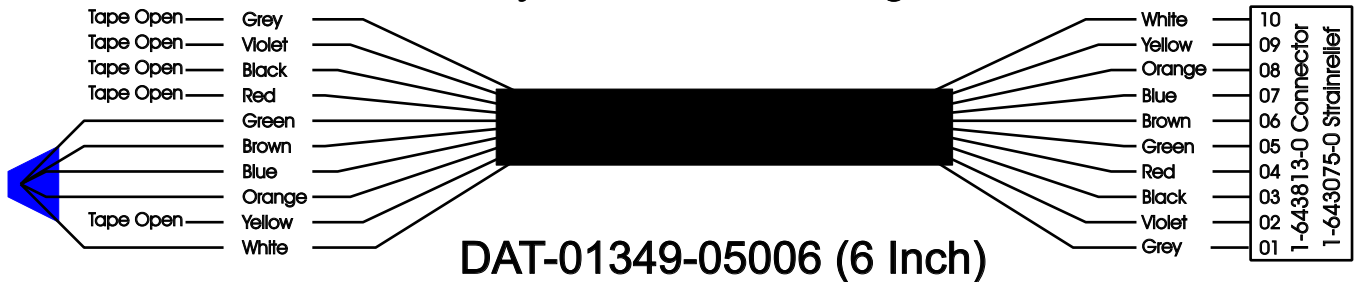

Operates Relays 4A, 4B, 5A and 5B with "IGNITION", on RCT-00786 or RCT-01414, Bus Power Center. Connects to J4-PCB-01083.

Carol C-9540, 24 AWG, Stranded 7/32/10, Foil 24 AWG Gnd shielded ten conductor cable.
Cut each jacket end 4 inches long, remove jacket on each end.
Requires one (1) Tyco/Amp. 1-643814-0 connector & Tyco/Amp. 1-643075-0 end cap.
Place connector into insertion equipment, start with #10 and complete with #1

Wire Nut; Green, Brown, Blue, Orange and White wires together.

#1 GREY, #2 VIOLET, #3 BLACK, #4 RED, #5 GREEN

#6 BROWN, #7 BLUE, #8 ORANGE, #9 YELLOW, #10 WHITE

D

A

T

1st three Letters = Data Cable

0

0

0

0

0

2nd five numbers = Print Number

0

0

3rd two numbers = Configuration

0

0

4th two numbers = Length In Feet

0

5th last digit = Length In Inches