


R. C. Tronics Incorporated

2573 East Kercher Road
Goshen, Indiana 46528
Toll Free 1-866-457-7790

Phone 1-574-642-3857
Fax 1-574-642-3858
<http://www.rctronics.com>

DAT-01349-12006 10 Conductor Data Cable

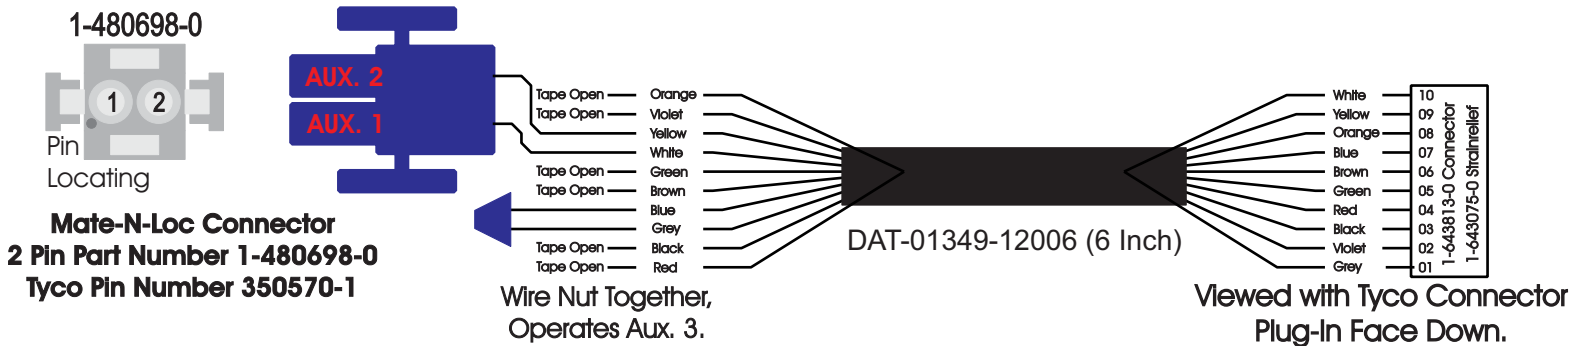

*Mate-N-Loc operates relays Aux. 1 & Aux. 2 with "IGNITION", on RCT-01490 or RCT-01507,
Bus Power Center connects to J4 on RCT-01544, Dash Switch Center.*

Blue & Grey Operates Aux. 3, with "IGNITION".

Carol C-9540, 24 AWG, Stranded 7/32/10, Foil 24 AWG Gnd shielded ten conductor cable.
Cut each jacket end 4 inches long, remove jacket on each end.
Requires one (1) Tyco/Amp. 1-643814-0 connector & Tyco/Amp. 1-643075-0 end cap.
Place connector into insertion equipment, start with #10 and complete with #1

Wire Nut the following wires together; Blue, Grey.

Add the following wires to Tyco Connector #1-480698-0; Yellow and White.

#1 GREY, #2 VIOLET, #3 BLACK, #4 RED, #5 GREEN

#6 BROWN, #7 BLUE, #8 ORANGE, #9 YELLOW, #10 WHITE

D
A
T

0
0
0
0
0
0

0
0

0
0

0
0

0
0

1st three Letters = Data Cable

2nd five numbers = Print Number

3rd two numbers = Configuration

4th two numbers = Length In Feet

5th last digit = Length In Inches