


R. C. Tronics Incorporated

2573 East Kercher Road
Goshen, Indiana 46528
Toll Free 1-866-457-7790

Phone 1-574-642-3857
Fax 1-574-642-3858
<http://www.rctronics.com>

DAT-01349-14006 10 Conductor Data Cable

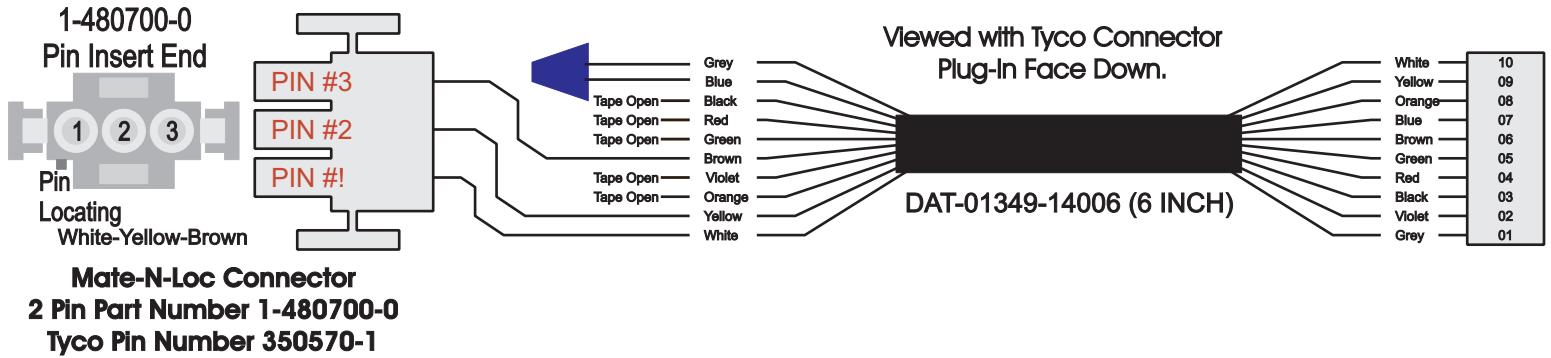

Mate-N-Loc operates relays Aux. #1 (Pin #1), Aux. #2 (Pin #2) and Heat (Pin #3) on Bus Power Center RCT-01507 with "IGNITION". Data Cable connects to PCB-01777-J3, Dash Switch Center.

**Carol C-9540, 24 AWG, Stranded 7/32/10, Foil 24 AWG Gnd shielded ten conductor cable.
Cut each jacket end 4 inches long, remove jacket on each end.
Requires one (1) Tyco/Amp. 1-643814-0 connector & Tyco/Amp. 1-643075-0 end cap.
Place connector into insertion equipment, start with #10 and complete with #1**

Wire Nut the following wires together; Grey and Blue.

Add the following wires to Tyco Connector #1-480698-0; Black and Red.

#1 GREY, #2 VIOLET, #3 BLACK, #4 RED, #5 GREEN

#6 BROWN, #7 BLUE, #8 ORANGE, #9 YELLOW, #10 WHITE

D
A 1st three Letters = Data Cable
T

0
0
0 2nd five numbers = Print Number
0
0

0
0 3rd two numbers = Configuration

0
0 4th two numbers = Length In Feet

0 5th last digit = Length In Inches