R. C. Tronics Incorporated

2573 East Kercher Road
Goshen, Indiana 46528
Toll Free 1-866-457-7790

Phone 1-574-642-3857
Fax 1-574-642-3858
http://www.rctronics.com

DAT-01353-XXXXX
28 Conductor Date Cable

Viewed with Tyco Connector Plug-In Face Down.

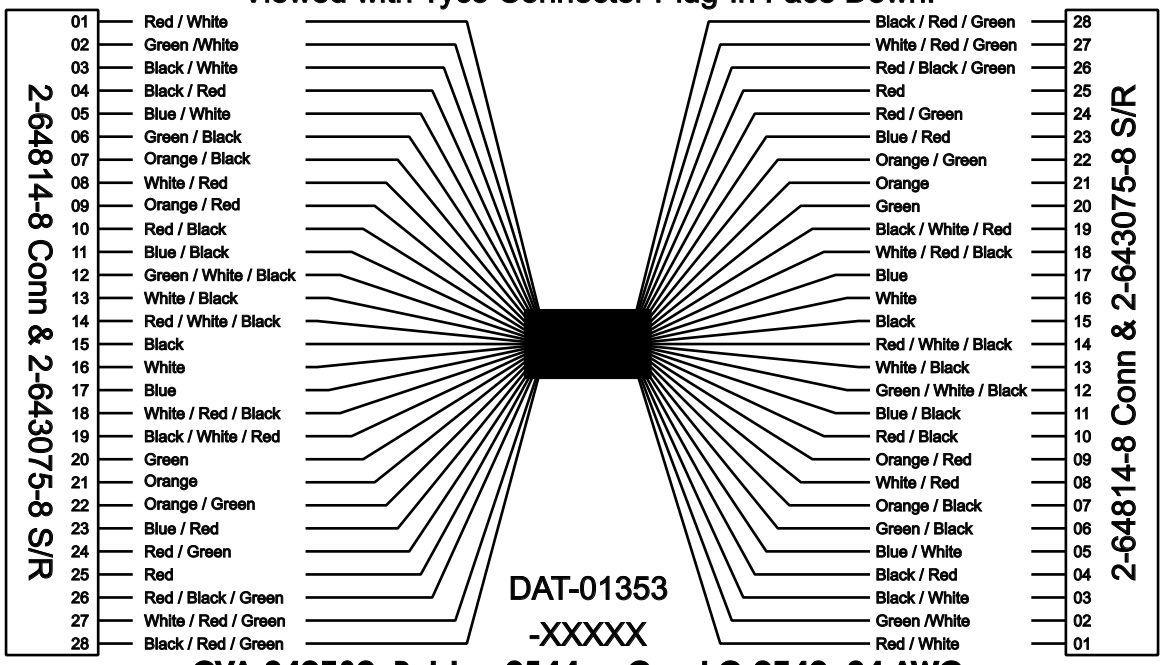

CVA-240730, Belden 9544 or Carol C-0749, 24 AWG,
Stranded 7/32/30, Foil 24 AWG Gnd shielded thirty conductor cable.
Cut each jacket end 4 inches long, remove jacket on each end.
Cut each jacket end 4 inches long, remove jacket on each end.
Cut each jacket end 4 inches long, remove jacket on each end.
Requires two (2) Tyco/Amp. 3-643814-0 connector & Tyco/Amp. 3-643075-0 end cap.
Place connector into insertion equipment, start with #28 and complete with #1
Terminate with .250 female tab on one end only.

CHECK CABLE WITH CABLE CHECKER

#1 RED/WHITE, #2 GREEN/WHITE, #3 BLACK/WHITE, #4 BLACK/RED, #5 BLUE/WHITE
#6 GREEN/BLACK, #7 ORANGE/BLACK, #8 WHITE/RED, #9 ORANGE/RED, #10 RED/BLACK
#11 BLUE/BLACK, #12 GREEN/WHITE/BLACK, #13 WHITE/BLACK, #14 RED/WHITE/BLACK
#15 BLACK, #16 WHITE, #17 BLUE, #18 WHITE/RED/BLACK #19 BLACK/WHITE/RED
#20 GREEN, #21 ORANGE, #22 ORANGE/GREEN, #23 BLUE/RED, #24 RED/GREEN, #25 RED
#26 RED/BLACK/GREEN, #27 WHITE/RED/GREEN, #28 BLACK/RED/GREEN,
#29 BLUE/BLACK/WHITE, #30 ORANGE/BLACK/WHITE,------ *CUT WTRES #29 & #30 OFF*

D A T	1st three Letters = Data Cable
0 0 0 0 0	2nd five numbers = Print Number
0 0	3rd two numbers = Configuration
0 0	4th two numbers = Length In Feet
0	5th last digit = Length In Inches