


# R. C. Tronics Incorporated

2573 East Kercher Road  
Goshen, Indiana 46528  
Toll Free 1-866-457-7790

Phone 1-574-642-3857  
Fax 1-574-642-3858  
<http://www.rctrionics.com>

DAT-01345-06XX0

## 02 Conductor Data Cable

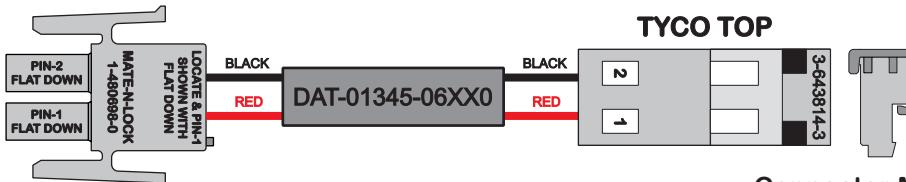

Connector MTA-100  
PDF Print: 643814.

Mate-N-Loc Connector, Flat Face Down  
2 Pin Part Number 1-480698-0  
Tyco Pin Number 350570-1

Viewed with Tyco Connector  
Plug-In Face Down.

This Data Cable operates RCT-01397, Starcraft LOGO with Backlight.

### Belden Part Number B-8442

Carol, 22 AWG, Stranded, unshielded two conductor cable.

Cut each jacket end 4 inches long, remove jacket on each end. Add heatshrink  
with DAT part number.

Requires one Tyco/Amp. 643814-3 connector & Tyco/Amp. 643075-3 end cap.  
Mate-N-Loc Connector 1-480698-0 Flat face down and insert pins as shown.

#1RED

#2 BLACK

D  
A  
T

1st three Letters = Data Cable

0  
0  
0

2nd five numbers = Print Number

0  
0

3rd two numbers = Configuration

0  
0

4th two numbers = Length In Feet

0

5th last digit = Length In Inches