


R. C. Tronics Incorporated

2573 East Kercher Road
Goshen, Indiana 46528
Toll Free 1-866-457-7790

DAT-01345-11XXX
02 Conductor Data Cable

Phone 1-574-642-3857
Fax 1-574-642-3858
<http://www.rctronics.com>

Viewed with Tyco Connector Plug-In Face Down.

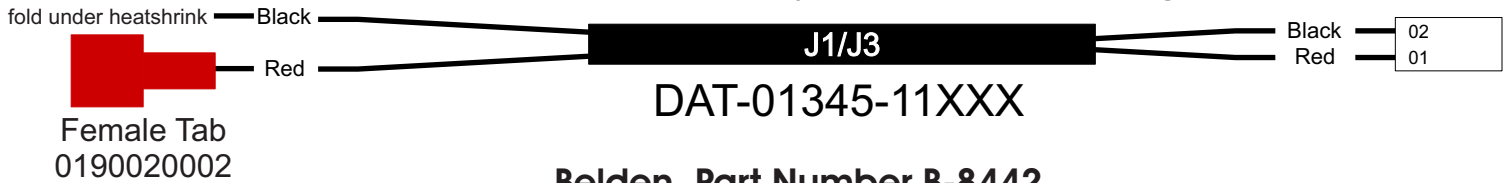

Belden Part Number B-8442

Carol , 22 AWG, Stranded, unshielded two conductor cable.

Cut each jacket end 4 inches long, remove jacket on each end. Add heatshrink with DAT part number.

Requires one (1) Tyco/Amp. 643814-2 connector & Tyco/Amp. 643075-2 end cap and 1.7inches heatshrink DAS-1013. Label J1/J3.

Terminate One End Only.

Place connector into insertion equipment, start with #2 and complete with #1

#1 RED

#2 BLACK

D
A
T
0
0
0
0
0
0
0
0
0
0

1st three Letters = Data Cable

2nd five numbers = Print Number

3rd two numbers = Configuration

4th two numbers = Length In Feet

5th last digit = Length In Inches