

R. C. Tronics Incorporated


2573 East Kercher Road
Goshen, Indiana 46528
Toll Free 1-866-457-7790

DAT-01346-03006
03 Conductor Data Cable

Phone 1-574-642-3857
Fax 1-574-642-3858
<http://www.rctronics.com>

Mate-N-Loc Connector, 2 Pin Part Number 1-480698-0

Viewed with Tyco Connector
Plug-In Face Down.

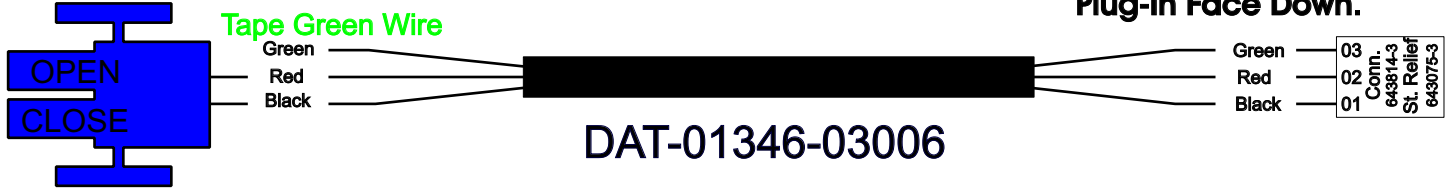

Two Conductor Wire may be used (01346)

Carol C-4062, 22 AWG, Stranded, unshielded three conductor cable.

Cut each jacket end 4 inches long, remove jacket on each end.

Requires two (1) Tyco/Amp. 643814-3 connector & Tyco/Amp. 643075-3 end cap.

Place connector into insertion equipment, start with #3 and complete with #1

CHECK CABLE WITH CABLE CHECKER

#1 BLACK

#2 RED

#3 Green (Tape This Wire)

D
A
T

1st three Letters = Data Cable

0
0
0
0
0

2nd five numbers = Print Number

0
0

3rd two numbers = Configuration

0
0

4th two numbers = Length In Feet

0

5th last digit = Length In Inches