


# R. C. Tronics Incorporated

2573 East Kercher Road  
Goshen, Indiana 46528  
Toll Free 1-866-457-7790

**DAT-01349-03006**  
**10 Conductor Data Cable**

Phone 1-574-642-3857  
Fax 1-574-642-3858  
<http://www.rctronics.com>

Viewed with Tyco Connector Plug-In Face Down.

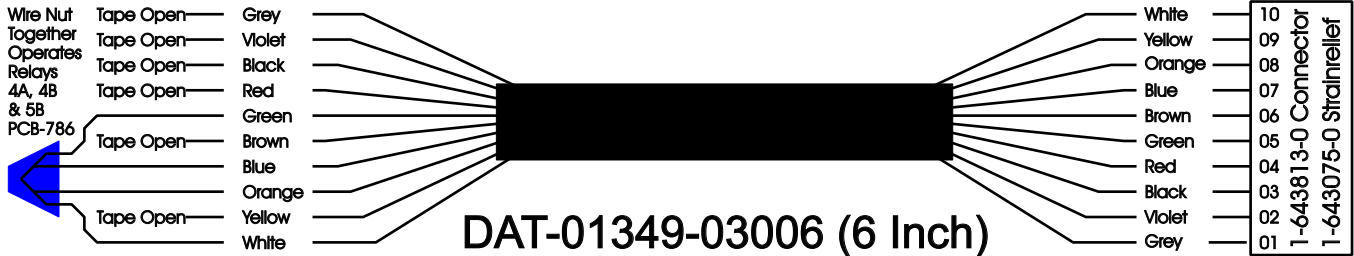

**Operates Relays 4A, 4B and 5B with "IGNITION", on RCT-00786 or RCT-01414, Bus Power Center. Connects to J4-PCB-01083.**

**Carol C-9540, 24 AWG, Stranded 7/32/10, Foil 24 AWG 24 Gnd shielded ten conductor cable.**  
**Cut each jacket end 4 inches long, remove jacket on each end.**  
**Requires one (1) Tyco/Amp. 1-643814-0 connector & Tyco/Amp. 1-643075-0 end cap.**  
**Place connector into insertion equipment, start with #10 and complete with #1**

**Wire Nut; Green, Blue, Orange and White wires together.**

**#1 GREY, #2 VIOLET, #3 BLACK, #4 RED, #5 GREEN**

**#6 BROWN, #7 BLUE, #8 ORANGE, #9 YELLOW, #10 WHITE**

D

A

T

1st three Letters = Data Cable

0

0

0

0

0

2nd five numbers = Print Number

0

0

3rd two numbers = Configuration

0

0

4th two numbers = Length In Feet

0

5th last digit = Length In Inches