


R. C. Tronics Incorporated

2573 East Kercher Road
Goshen, Indiana 46528
Toll Free 1-866-457-7790

DAT-01352-XXXXX 30 Conductor Data Cable

Phone 1-574-642-3857
Fax 1-574-642-3858
<http://www.rctronics.com>

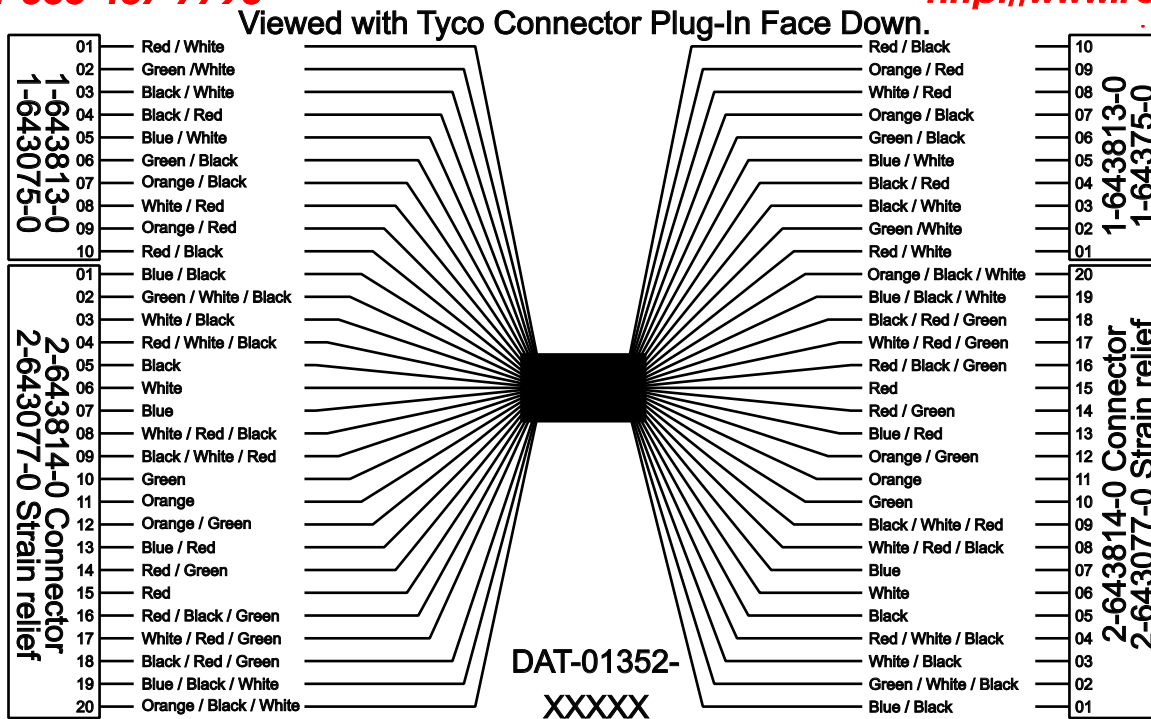

**CVA-240730, Belden 9544 or Carol C-0749, 24 AWG,
Stranded 7/32/30, Foil 24 AWG Gnd shielded thirty conductor cable.**

Cut each jacket end 4 inches long, remove jacket on each end.

Cut 3/4 inch of 1/2 inch heat shrink, place over cut cable jacket, shrink with heat gun.

Requires two (2) Tyco/Amp. 1-643814-0 connector & Tyco/Amp. 1-643075-0 end cap.

Requires two (2) Tyco/Amp. 2-643814-0 connector & Tyco/Amp. 2-643075-0 end cap

Place connector into insertion equipment, start with #30 and complete with #1

Terminate with .250 female tab on one end only.

CHECK CABLE WITH CABLE CHECKER

**#1 RED/WHITE, #2 GREEN/WHITE, #3 BLACK/WHITE, #4 BLACK/RED, #5 BLUE/WHITE#6 GREEN/BLACK,
#7 ORANGE/BLACK, #8 WHITE/RED, #9 ORANGE/RED, #10 RED/BLACK#11 BLUE/BLACK,
#12 GREEN/WHITE/BLACK, #13 WHITE/BLACK, #14 RED/WHITE/BLACK#15 BLACK, #16 WHITE, #17 BLUE,
#18 WHITE/RED/BLACK #19 BLACK/WHITE/RED#20 GREEN, #21 ORANGE, #22 ORANGE/GREEN,
#23 BLUE/RED, #24 RED/GREEN, #25 RED#26 RED/BLACK/GREEN, #27 WHITE/RED/GREEN,
#28 BLACK/RED/GREEN, #29 BLUE/BLACK/WHITE, #30 ORANGE/BLACK/WHITE**

D
A
T

0
0
0
0
0

0
0
0
0
0
0
0
0
0

1st three Letters = Data Cable

2nd five numbers = Print Number

3rd two numbers = Configuration

4th two numbers = Length In Feet

5th last digit = Length In Inches